

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : H04N 7/16, 7/58</p>	<p>A1</p>	<p>(11) International Publication Number: WO 95/19092</p>	<p>(43) International Publication Date: 13 July 1995 (13.07.95)</p>
<p>(21) International Application Number: PCT/US95/00109</p> <p>(22) International Filing Date: 4 January 1995 (04.01.95)</p> <p>(30) Priority Data: 9400101.3 5 January 1994 (05.01.94) GB</p>		<p>(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ).</p>	
<p>(71) Applicant: THOMSON CONSUMER ELECTRONICS, INC. [US/US]; 10330 North Meridian Street, Indianapolis, IN 46290-1024 (US).</p> <p>(72) Inventors: CHANEY, John, William; 8107 Shoreridge Terrace, Indianapolis, IN 46236 (US). BEYERS, Billy, Wesley, Jr.; 6920 Woodcrest Drive, Greenfield, IN 46140 (US). JOHNSON, Michael, Wayne; 7316 Cobblestone West Drive, Indianapolis, IN 46236 (US). HAILEY, James, Edwin; 7239 Creekside Lane, Indianapolis, IN 46250 (US). BRIDGEWATER, Kevin, Elliott; 290 South Muessing Road, Indianapolis, IN 46229 (US). DEISS, Michael, Scott; 1103 Indian Pipe Lane, Zionsville, IN 46077 (US). HORTON, Raymond, Scott; 9686 Spruce Lane, Fishers, IN 46038 (US).</p>		<p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	
<p>(74) Agents: TRIPOLI, Joseph, S. et al.; GE &amp; RCA Licensing Management Operation, Inc., CN 5312, Princeton, NJ 08540 (US).</p>			
<p>(54) Title: CONSUMER INTERFACE FOR A DIGITAL TELEVISION SYSTEM</p>			

**(54) Title:** CONSUMER INTERFACE FOR A DIGITAL TELEVISION SYSTEM

CH 150		Program Guide		7:35pm	
7:30pm		8:00pm		8:30pm	
				9:00pm	
HBO 102	OTHER PEOPLE'S MONEY		FREE PREVIEW		DREAM ON
CBS 106	EVENING NEWS	FRANKIE'S TURN	BROOKLYN BRIDGE		RAVEN
WTTV 150	MASH	IMMEDIATE FAMILY			
CINE 210	EYEWITNESS	FUN CITY			DOUBLE TROUBLE
CNN 305	PRIME NEWS	BOTH SIDES	RELIABLE SOURCES		WORLD NEWS
USA 422	COUNTER STRIKE		QUANTUM LEAP		
MORE		MOVIES		SPORTS	
OTHER		ALL		EXIT	

### (57) Abstract

A television system for receiving a plurality of digitally-encoded television programs includes circuitry for selecting a particular digital data transmission channel from a plurality of digital data transmission channels containing a desired digitally-encoded television program in response to a control signal, at least one of the data transmission channels also including television program schedule data. The system also includes user-operable data entry circuitry for entering data, and a controller for generating the above-noted control signal in response to user-entered data. The controller selects a virtual channel from a plurality of virtual channels in response to user-entered data, each virtual channel being subject to reassignment to a different one of said plurality of digital data transmission channels, the television program schedule data defining the relationship of each of the television programs to respective ones of the plurality of digital data transmission channels.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## CONSUMER INTERFACE FOR A DIGITAL TELEVISION SYSTEM

5

### FIELD OF THE INVENTION

This invention is related to the field of digital communications systems, and is described with reference to a digital satellite television system, but also may be applicable to such systems as a digital cable system, digital terrestrial broadcast system, or a digital communication system which utilizes telephone lines. The invention also concerns screen displays for controlling such a system.

15

### BACKGROUND OF THE INVENTION

In a satellite television communication system, the satellite receives a signal representing audio, video, or data information from an earth-based transmitter. The satellite amplifies and rebroadcasts this signal to a plurality of receivers, located at the residences of consumers, via transponders operating at specified frequencies and having given bandwidths. Such a system includes an uplink transmitting portion (earth to satellite), an earth-orbiting satellite receiving and transmitting unit, and a downlink portion (satellite to earth) including a receiver located at the user's residence. The subject matter of the present invention is especially concerned with a downlink receiving unit designed for relatively easy use by the user.

The subject system is designed to employ two satellites within a few degrees of each other in geosynchronous earth-orbit stationed at an altitude of 22,300 miles, approximately over the state of Texas. With this arrangement, receivers located anywhere in the contiguous 48 states of the United States can receive signals from both satellites on the same receiving antenna dish without having to reposition the antenna dish. Each satellite transmits its signals with a respective polarization. Selecting a satellite for reception of its signals is accomplished at the

receiving antenna by selecting those signals with the appropriate polarization. Each satellite includes sixteen transponders for  
5 transmitting signals to the receiving antenna dish over a range of frequencies. Each transponder is time-multiplexed to convey a plurality of television channels (e.g., six to eight channels), substantially simultaneously. The satellite signals are transmitted in compressed and packetized form, and comprise television and  
10 ancillary data signals. Because the system is capable of carrying as many as two hundred fifty-six channels, some television program selection method and apparatus, which is easy to understand and operate, should be provided for the user.

If we look to conventional analog VHF and UHF  
15 broadcast television as a guide, we find that the solution provided therein is of little help, for the following reasons. The channel number of a given television station corresponds to a fixed band of frequencies. In other words, channel 6 in the United States is regulated to occupy the range from 82-88 MHz. Most non-  
20 technical consumers have no understanding of the frequency allocations of the television broadcast bands. Instead, they tune a desired channel by entering its channel number into their receiver. Their receiver is programmed with the proper information to perform the required tuning to the desired channel  
25 by generating the appropriate bandswitching and tuning commands, in response to the entering of the channel number by the user. It is possible for manufacturers to build a fixed channel number-to-frequency translation arrangement into each television receiver, only because the relationship between channel  
30 number and frequency band must conform to a broadcast standard.

This fixed-frequency standard is acceptable to the broadcasters because their transmitting equipment is readily accessible for maintenance purposes due to its location on the  
35 ground. If the transmitter malfunctions, it can be repaired and the station can be back "on-the-air" at its designated frequency

band in a relatively short time. In contrast, a fixed-frequency arrangement for a satellite is undesirable because of the practical  
5 inaccessibility of an orbiting satellite. In the event that a transponder malfunctions, that transponder is thereafter inoperative, essentially forever, and receivers programmed to tune that transponder to receive a desired television program would not receive a usable signal. In such an event, the receiver  
10 will have lost the desired television channels.

A satellite receiver may be programmed to perform a function similar to the common autoprogramming function, in which a television receiver searches for all active channels and records detection of each as it is found. If such a system is used  
15 after a transponder failure, the failed transponder will be noted and a new active transponder will be found (assuming that the programming has been moved to a new transponder by ground-based control personnel). The user's receiver would then have to perform an internal remapping to associate the desired channel  
20 with the new transponder. However, in the event that a power supply module failed in the satellite, several transponders which may receive power from that module may cease transmitting at once. In such an event, the autoprogramming solution given above will not work because several new transponders will be  
25 found at the same time as several old transponders are noted as missing. In such a case, the receiver will have no way of allocating the received signals to their proper channels. Moreover, as noted above, since each transponder conveys six to eight channels, the channels assigned to the failed transponder may be distributed  
30 among several still-functioning transponders. In that case the receiving antenna will have access to all of the television channels, but the receiver will, quite literally, not know where to find those channels which have been moved.

### SUMMARY OF THE INVENTION

A television system for receiving a plurality of  
5 digitally-encoded television programs includes an integrated  
receiver decoder (IRD) having circuitry for selecting a particular  
digital data transmission channel from a plurality of digital data  
transmission channels containing a desired digitally-encoded  
television program in response to a control signal, at least one of  
10 the data transmission channels also including television program  
schedule data. The system also includes user-operable data entry  
circuitry for entering data, and a controller for generating the  
above-noted control signal in response to user-entered data. The  
controller selects a virtual channel from a plurality of virtual  
15 channels in response to user-entered data, each virtual channel  
being subject to reassignment to a different one of said a plurality  
of digital data transmission channels, the television program  
schedule data defining the relationship of each of the television  
programs to respective ones of the plurality of digital data  
20 transmission channels. Each digital transmission channel provides  
a "packetized digital data multiplex" (PDDM) of program guides,  
audio, video and data. As such, the subject system provides a  
comprehensive and logical organization for transmission of  
multiple television programs in digital form useful in both  
25 satellite and terrestrial broadcasting.

### BRIEF DESCRIPTION OF THE DRAWING

FIGURES 1 and 2 are illustrations of a typical transmitted  
30 data stream from a transponder in accordance with the invention.

FIGURE 3 is an illustration of a program guide screen display  
in accordance with the invention.

FIGURE 4 is an illustration of segmentation of the master  
program guide and special program guides in accordance with the  
35 invention.

FIGURES 5a and 5b are illustrations of program data structures in accordance with the invention.

5       FIGURE 6 is a block diagram of a satellite transmitting/receiving system according to the invention.

FIGURE 7 is a block diagram of the IRD receiver unit.

FIGURE 8 is a block diagram of a portion of the IRD receiver unit of FIGURES 6 and 7, in detail.

10

#### DETAILED DESCRIPTION OF THE DRAWING

In the subject system, the information necessary to select a given television program is not fixedly-programmed into each receiver but is rather is down-loaded from the satellite continually on each transponder. The television program selection information comprises a set of data known as a Master Program Guide (MPG), which relates television program titles, their start and end times, a virtual channel number to be displayed to the user, and information allocating virtual channels to transponder frequencies and to a position in the time-multiplexed data stream transmitted by a particular transponder. In a system according to the subject invention, it is not possible to tune any channel until the first master program guide is received from the satellite, because the receiver literally does not know where any channel is located, in terms of frequency and position (i.e. data time slot) within the data stream of any transponder. The concept of virtual channels allows allocation of virtual channel numbers by category, such as, sports, movies, news. This realization, in turn, allows for active and inactive virtual channels. That is, ten virtual channels assigned to sporting events on a Saturday afternoon, may be inactivated after the games and may provide enough bandwidth to support, for example, twenty movie channels. Thus, the user has the perception that he has many more channels than, in fact, could be supported simultaneously, by the available bandwidth. Another words, the concept of virtual channels allows time-multiplexing of the system bandwidth. Moreover, it allows a

15  
20  
25  
30  
35

5 television program requiring greater bandwidth (such as a sporting event) to "borrow" bits from a second television program on the same transponder which does not require as great a bandwidth (such as a "talk show"). Thus, the available bandwidth of a given transponder can be reallocated, as needed, from one virtual channel to another.

10 Advantageously, the system is totally flexible in that any program may be assigned, or reassigned at any master program guide transmission time, to any transponder or data time slot, in a fashion which is completely transparent to the user, who sees only the unchanged program title and virtual channel. Thus, the problem of multiple failed transponders can be solved without  
15 the user even being aware that it has occurred, by a quickly performed reallocation of the affected television programs to functioning transponders with unused data time slots, and by transmitting a new program guide to the users.

20 A master program guide is preferably transmitted on all transponders with the television program video and audio data, and is repeated periodically, for example, every 2 seconds. The master program guide is not encrypted, and can be used by the receiver immediately after being received and stored. The master program guide, once received, is maintained in a memory  
25 unit in the receiver, and updated periodically, for example every 30 minutes. Retention of the master program guide allows instantaneous television program selection because the necessary selection data are always available. If the master program guide were to be discarded after using it to select a television program,  
30 then a delay of at least two seconds would be incurred while a new program guide was acquired, before any further television program selections could be performed.

As noted above, the system is capable of transmitting hundreds of programs. Each program may include a number of  
35 services. A service is defined herein as a program component, such as a video signal, an audio signal, a closed caption signal, or



other data, including executable computer programs, for an appropriate receiver. Each service of each program is identified by a unique Service Component Identifier (SCID). The information for the respective services is transmitted in packets of predetermined amounts of data(e.g., 130 bytes) and each packet includes an SCID corresponding to the service.

A representation of a typical data stream from one of the transponders is shown in FIGURE 1, and a typical packet from that data stream is shown in FIGURE 2. In FIGURE 1, a string of boxes represents signal packets which are components of a plurality of different television programs transmitted by a given transponder. Packets with letters having like subscripts represent components of a single television program. For example, packet identified as V<sub>1</sub>, A<sub>1</sub> and D<sub>1</sub>, represent video, audio, and data for program 1. In the upper line of the string of packets, the respective components of a particular program are shown grouped together. However, it is not necessary to group components of a particular program together, as indicated by the packet sequence in the middle of the string. Moreover, there is no requirement to place the packets of a string in any particular order.

The string of packets shown in the lower portion of FIGURE 1, represents three time multiplexed programs, programs 1, 2, and 3, plus packets representing a program guide (packets D<sub>4</sub>). It is important to note that the data of the program guide interrelates program components and virtual channels by virtue of the SCID. The respective packets are arranged to include a prefix and a payload as shown in FIGURE 2. The prefix of this example includes two 8-bit bytes comprising five fields, four of which are 1-byte fields (P,BB,CF,CS), and one 12-bit field (SCID). The Payload portion contains the actual information to be received and processed. As shown in FIGURE 2, an exemplary prefix includes a 1-bit priority field (P); a 1-bit boundary field (BB), which indicates boundaries between significant signal changes; a 1-bit field (CF), which indicates whether or not the payload is

scrambled; a 1-bit field (CS), which indicates which one of two descrambling keys is to be used to descramble a scrambled payload; and a 12-bit SCID. The remainder of the packet comprises the payload which may include error code parity bits appended to the end of the payload data.

A master program guide comprises packetized data formatted as defined above, and is assigned a specific SCID, such as, 0000 0000 0001. A master program guide comprises four sequential blocks of data, designated, SEGM, APGD, CSSM1 . . . CSSMnseg, and PISM1 . . . PISMnseg, to be described below.

A master program guide typically includes television schedules for the next two hours, but may include schedules for four, six, or eight hours depending on the size of the memory allocated to store it in the receiver. In addition to the master program guide, there is also provided one or more special program guides (SPG), containing additional data, such as, for example, television program schedules for the following eight hours. That is, the master guide holds all information necessary for selecting current television programs, and the special guides contain information about future television programs. Special guides are downloaded from the satellite as needed and are not retained in memory due to their large size. As shown in FIGURE 4, both the master program guide and special program guides are partitioned into a plurality of segments or portions (from 0 to 15) with an index "nseg" indicating the current number of segments comprising the special guide. Each segment carries program information for one or more virtual channels which range from 100 to 999. FIGURE 4 shows only an exemplary allocation of virtual channels to segments, and other groupings can be made at the discretion of the operators at the satellite uplink center. Each special guide segment includes two sequential blocks of data, CSSM1 . . . CSSMnseg, and PISM1 . . . PISMnseg, also to be described below.

FIGURES 5a and 5b show program data structures of the subject satellite transmission system. Note that the Segment Map (SEGM) block of the master program guide contains information about the partitioning of the channel space into segments, and the number of segments. The Additional Program Guide Data (APGD) block contains a program guide map which indicates which special program guide segments are active, and their location (i.e., the particular transponder carrying the segment), as well as the SCIDs of the respective segments. The APGD block contains program information relating to ratings and theme of a particular television program. The APGD also includes a program guide map associating special guide segments with respective names, numbers, and types.

The master guide and every special guide contain a Channel to Service Segment Map (CSSM) block and a Program Information Segment Map (PISM) block. The CSSM describes virtual channels (e.g., by listing information as to channel name, call letters, channel number, and type) which are in the corresponding segment. The PISM block contains linked lists of program information such as, title, start time, duration, rating, and category, that are on each virtual channel described in the corresponding Channel to Service Segment Map (CSSM).

Relevant portions of the data structures shown in FIGURES 3, 4, 5a and 5b will be referred to in the following description of the program selection process. That is, many portions of the data structures shown in FIGURES 5a and 5b concern functions other than virtual channel selection, such as purchase information, and will not be discussed. Referring to FIGURE 3, a user selects a television program for viewing, by moving a cursor (via operation of remote control up, down, right, and left, direction control keys, not shown) to a block of the program guide screen display which contains the name of the desired program. When a SELECT key of the remote control is

pressed, the current x and y position of the cursor is evaluated to derive virtual channel and program time information.

5           As shown in FIGURE 4, and as noted above, the master program guide and special program guides are divided into segments (which may be as few as one segment or as many as 16). The lowest virtual channel (100) is always allocated as the first channel of seg (0). Each segment contains channel and  
10   program information for a defined number of virtual channels. Upon deriving the virtual channel number from the X and Y cursor position information, the virtual channel number is used to point into the proper segment of the particular program guide (either master program guide, or a special program guide) to  
15   retrieve the specific channel information and program information. Specifically, the Channel Information (CI) Records in the CSSM (Channel to Service Segment Map) are a fixed length of seventeen bytes and contain such items as, the number of SCIDs in use (typically 2, audio and video), the channel transponder (Chan  
20   Xpndr) the channel number and short name (i.e., typically four characters), and a pointer into the linked program information. In order to access any specific Channel Information (CI) it is only required to repeatedly add seventeen to a base value. Program  
25   information includes the start day and time of the program, the number of thirty minute slots it occupies, the theme category (i.e., drama, sports, comedy), and parental rating.

          Once the channel transponder carrying a desired television program is tuned, the data packets containing the audio and video information for that program can be selected from the  
30   data stream received from the transponder by examining the data packets for the proper SCID (Service Component Identifier) 12 bit code. If the SCID of the currently received data packet matches the SCID of the desired television program as listed in the program guide, then the data packet is routed to the proper data  
35   processing sections of the receiver. If the SCID of a particular

packet does not match the SCID of the desired television program as listed in the program guide, then that data packet is discarded.

5           A brief description of system hardware, suitable for implementing the above-described invention, now follows. In FIGURE 6, a transmitter 601 processes a data signal from a source 614 (e.g., a television signal source) and transmits it to a satellite 613 which receives and rebroadcasts the signal to a receiver 612.  
10 Transmitter 601 includes an encoder 602, a modulator/forward error corrector (FEC) 603, and an uplink unit 604. Encoder 602 compresses and encodes signals from source 614 according to a predetermined standard such as MPEG. MPEG is an international standard developed by the Moving Picture Expert Group of the  
15 International Standards Organization for coded representation of moving pictures and associated audio stored on digital storage medium. An encoded signal from unit 602 is supplied to modulator/Forward Error Corrector (FEC) 603, which encodes the signal with error correction data, and Quaternary Phase Shift Key  
20 (QPSK) modulates the encoded signal onto a carrier. Both convolutional and Reed-Solomon (RS) block coding are performed in block 603.

          Uplink unit 604 transmits the compressed and encoded signal to satellite 613, which broadcasts the signal to a  
25 selected geographic reception area. In this embodiment, satellite 613 operates in two modes, which trade off channel capacity for transmission power, or transmission power for channel capacity. In the first mode, satellite 613 illustratively transmits sixteen channels at 120 watts each. In the second mode, satellite 613  
30 transmits eight channels at 240 watts each.

          The signal from satellite 613 is received by an antenna dish 605 coupled to an input of a so-called set-top receiver 612 (i.e., an interface device situated atop a television receiver). Receiver 612 includes a demodulator/Forward Error Correction  
35 (FEC) decoder 607 to demodulate the signal and to decode the error correction data, a microprocessor 606, which operates

interactively with demodulator/FEC unit 607, and a transport unit 608 to transport the signal to an appropriate decoder within unit 609 depending on the content of the signal, i.e., audio or video information. Transport unit 608 receives corrected data packets from unit 607 and checks the header of each packet to determine its routing. Decoders in unit 609 decode the signal and remove added transport data, if used. An NTSC Encoder 610 encodes the decoded signal to a format suitable for use by signal processing circuits in a standard NTSC consumer television receiver 611.

FIGURE 7 is a block diagram showing the components of the IRD receiver system including the outdoor antenna dish unit 7-5. The IRD includes a block 707 including a tuner 734 and a demodulator unit 735 for tuning various television signals. The IRD is under control of a microcontroller 706, which also controls the interfaces between the IRD and a telephone network via a telephone modem 734, between the IRD and a user via an IR link 725 and between the IRD and a television receiver via an MPEG decoder 723, a video encoder 721, and an RF modulator 722, and finally, between the IRD unit and a user via a smart card interface and transport IC 708.

Referring now to FIGURE 8, demodulator/FEC unit 807 acquires, demodulates, and decodes the data signal which is received from antenna dish 805. This unit includes a tuner 834, a Quaternary Phase Shift Key (QPSK) demodulator 835, a Viterbi convolutional decoder 836, a de-interleaver 837, and a Reed-Solomon (RS) decoder 838, all of conventional design, arranged as shown.

Tuner 834 receives an input signal from antenna dish 805. Based upon a user's channel selection, a control unit 806 (i.e., a microprocessor) sends a frequency signal to tuner 834. This signal cause tuner 834 to tune to the appropriate channel and to downconvert the received signal in frequency in response to the tuning frequency signal sent to tuner 834 from microprocessor

806. An output signal from tuner 34 is provided to QPSK demodulator 835.

5           QPSK demodulator 835 locks onto (synchronizes with) the tuned channel, demodulates the modulated data signal, and generates a signal indicative of the quality of the demodulated signal. Demodulator 835 demodulates the modulated input data signal regardless of the error correction code rate of the received  
10 data signal. Phase-locked loop circuitry in demodulator 835 synchronizes the operation of demodulator 835 with the input signal using well-known techniques. Demodulator 835 generates a Demodulator Lock output control signal that indicates whether or not demodulator 835 is synchronized with the input signal, and  
15 supplies this signal to a storage register in microprocessor 806. an output demodulated data signal from unit 835 is provided to Viterbi decoder 836. Demodulator 835 also generates an output Signal Quality signal, which is indicative of the quality of the signal received from the satellite transmission, and is related to  
20 the signal-to-noise ratio of the received signal. Various sources of noise, as well as rain fade, may impair the quality of a received signal. A QPSK demodulator suitable for use as unit 835 is commercially available from Hughes Network Systems of Germantown, Maryland (integrated circuit type No. 1016212), and  
25 from Comstream Corp., San Diego California (No. CD2000).

Decoder 836 uses a Viterbi algorithm to decode and to correct bit errors in the demodulated signal from unit 835. Decoder 836 includes internal networks, as known, to synchronize its operation to the incoming demodulated signal in order to  
30 effectively decode the demodulated signal.

After decoder 836 decodes and error corrects the demodulated data signal, the decoded data signal is supplied to a de-interleaver 837. De-interleaver 837 restores the ordering of the data signal to its original sequence, and forms Reed-Solomon  
35 blocks (RS blocks), in accordance with known techniques. For this purpose de-interleaver 837 relies upon an 8-bit sync word

inserted by the encoder at the beginning of each RS block, thereby providing RS block synchronization. The de-interleaved signal is  
5 supplied to a Reed-Solomon (RS) decoder 838.

RS decoder 838 decodes the RS blocks and corrects byte errors within a block. A decoded signal from Viterbi decoder 836 is provided to RS decoder 838 via de-interleaver 837. If decoder 36 uses the proper error correction decode rate to decode  
10 the data signal, de-interleaver 837 and Reed-Solomon decoder 838 will operate normally.

Thus, a digital multi-channel transmission system has been disclosed and described which allocates television programs to transponders and to time-multiplexed slots in the data stream  
15 of a given transponder in a way which is completely transparent to the user, who simply tunes a desired television program by selecting a virtual channel. It has been further explained above, that the key to the smooth operation of this system is the transmission of the master and special channel guides which  
20 relate transponder channels and program data positions in the transponder data stream to virtual channel numbers.



## CLAIMS

- 5           1. A television system for receiving a plurality of  
digitally-encoded television programs, comprising:  
          means for selecting a particular digital data transmission  
channel from a plurality of digital data transmission channels  
containing a desired one of said digitally-encoded television  
10 programs in response to a control signal, at least one of said data  
transmission channels also including television program schedule  
data;  
          user-operable data entry means for entering data;  
          control means coupled to said selecting means and to said  
15 data entry means for generating said control signal in response to  
said user-entered data; and  
          said control means selecting a virtual channel from a  
plurality of virtual channels in response to said user-entered data,  
each virtual channel being subject to reassignment to a different  
20 one of said a plurality of digital data transmission channels, said  
television program schedule data defining the relationship of each  
of said television programs to respective ones of said plurality of  
digital data transmission channels.
- 25           2. The television system of claim 1 wherein, said  
virtual channels bear numbers allocated according to program  
content.
- 30           3. The television system of claim 2 wherein, said  
virtual channels are subject to activation and deactivation, and  
wherein the transmission channel bandwidth currently allocated  
to a deactivated virtual channel is reallocated to a newly activated  
virtual channel.

4. The television system of claim 1 wherein, television signals of each of said television programs is transmitted in compressed form, and said television system includes means for decompressing signals of said television programs for display.

5. The television system of claim 4 further comprising, on-screen graphics generation means for generating a matrix of broadcast times and virtual channels corresponding to a schedule of said television programs in response to said television program schedule data.

6. The system of claim 5 wherein, a user selects one of said virtual channels from said displayed television schedule matrix and in response said controller selects a corresponding digital data transmission channel for reception of said television program.

7. A television system for receiving a plurality of digitally-encoded television programs, comprising:  
means for selecting a particular data channel in response to a control signal, which particular data channel may be allocated to one or more transmission channels, each of said data channels containing a desired one of said digitally-encoded television programs, at least one of said transmission channels also including television program schedule data;

user-operable data entry means for entering data;  
control means coupled to said selecting means and to said data entry means for generating said control signal in response to said user-entered data; and

said control means selecting a data channel in response to said user-entered data, each data channel being subject to reallocation to a different one of said plurality of transmission channels, said television program schedule data defining the

relationship of each of said television programs to respective ones of said plurality of transmission channels.

5

8. A television system for receiving a plurality of digitally-encoded television programs transmitted in packetized form via one of a plurality of a data transmission channels, comprising:

10 means for selecting data packets corresponding to a particular digitally-encoded television program from a plurality of data packets corresponding to said plurality of digitally-encoded television programs in response to a control signal;

15 said particular digitally-encoded television program being subject to allocation to any of said data transmission channels, each of said data transmission channels containing at least one digitally-encoded television program and television program schedule data;

20 user-operable data entry means for entering data; and control means coupled to said selecting means and to said data entry means for generating said control signal in response to said user-entered data;

25 said control means selecting a digitally-encoded television program in response to said user-entered data, said television program schedule data defining the relationship of each of said digitally-encoded television programs to respective ones of said plurality of data transmission channels.


30 9. The system of claim 8 wherein, a user selects one of said television program title from a displayed television schedule matrix and in response said controller selects a corresponding data transmission channel for reception of said television program and selects for processing only those data packets corresponding to said particular digitally-encoded television program.

35

10. The system of claim 9 wherein, said data packets  
corresponding to said particular digitally-encoded television  
5 program are identified by an identification code.

11. The system of claim 10 wherein, said data packets  
corresponding to said particular television schedule data are  
identified by a second identification code.

1/9

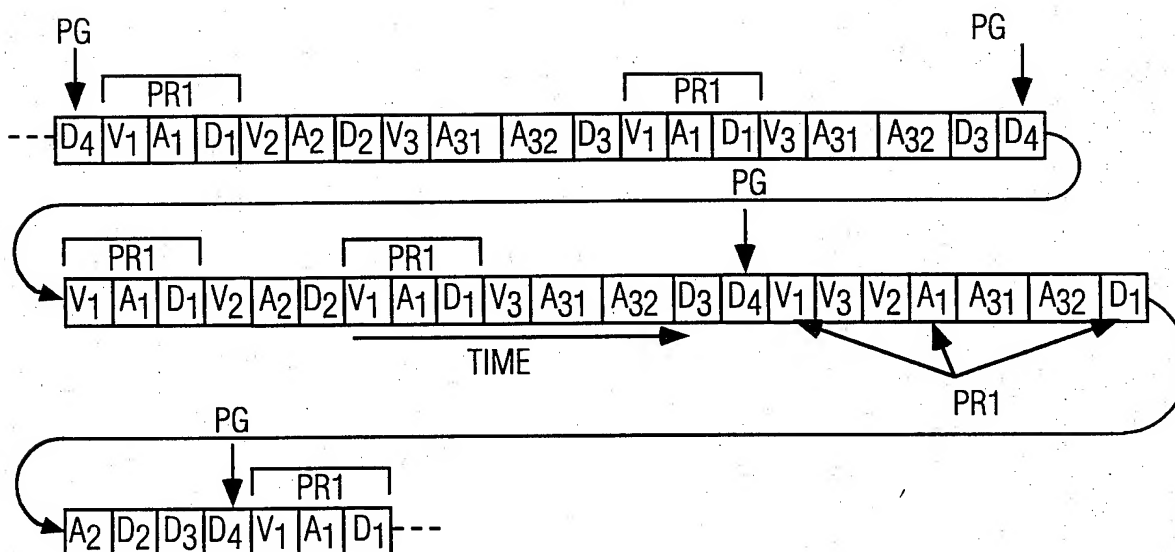

V <sub>1</sub> A <sub>1</sub> D <sub>1</sub>	PROGRAM #1 SIGNAL COMPONENT PACKETS
V <sub>2</sub> A <sub>2</sub> D <sub>2</sub>	PROGRAM #2 SIGNAL COMPONENT PACKETS
V <sub>3</sub> A <sub>31</sub> A <sub>32</sub> D <sub>3</sub>	PROGRAM #3 SIGNAL COMPONENT PACKETS
D <sub>4</sub>	PROGRAM GUIDE PACKETS
V <sub>i</sub>	VIDEO PROGRAM i
A <sub>i</sub>	AUDIO PROGRAM i
D <sub>i</sub>	DATA PROGRAM i

FIG. 1

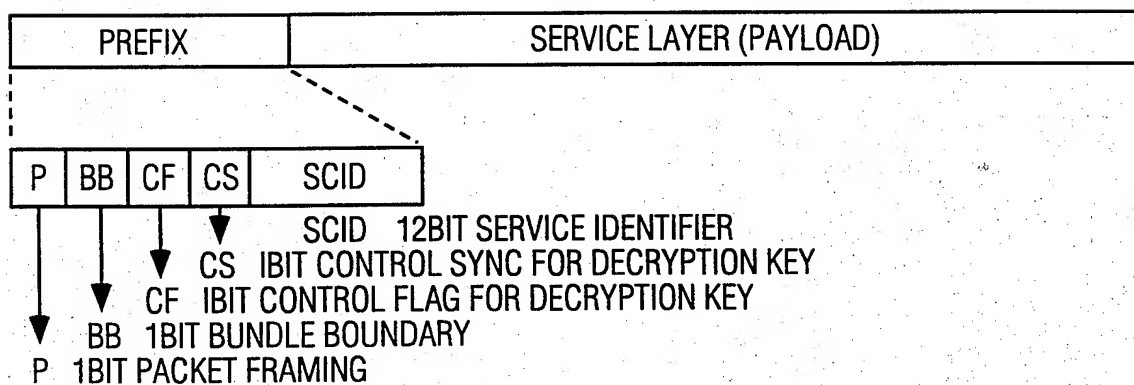


FIG. 2

2/9

CH 150

Program Guide

7:35pm

7:30pm

8:00pm

8:30pm

9:00pm


HBO 102	OTHER PEOPLE'S MONEY		FREE PREVIEW	DREAM ON
CBS 106	EVENING NEWS	FRANNIE'S TURN	BROOKLYN BRIDGE	RAVEN
WTTV 150	IMMEDIATE FAMILY			
CINE 210	EYEWITNESS	FUN CITY	DOUBLE TROUBLE	
CNN 305	PRIME NEWS	BOTH SIDES	RELIABLE SOURCES	WORLD NEWS
USA 422	COUNTER STRIKE		QUANTUM LEAP	
MORE	MOVIES	SPORTS	OTHER	ALL
			EXIT	

110

FIG

FIG. 3

3/9

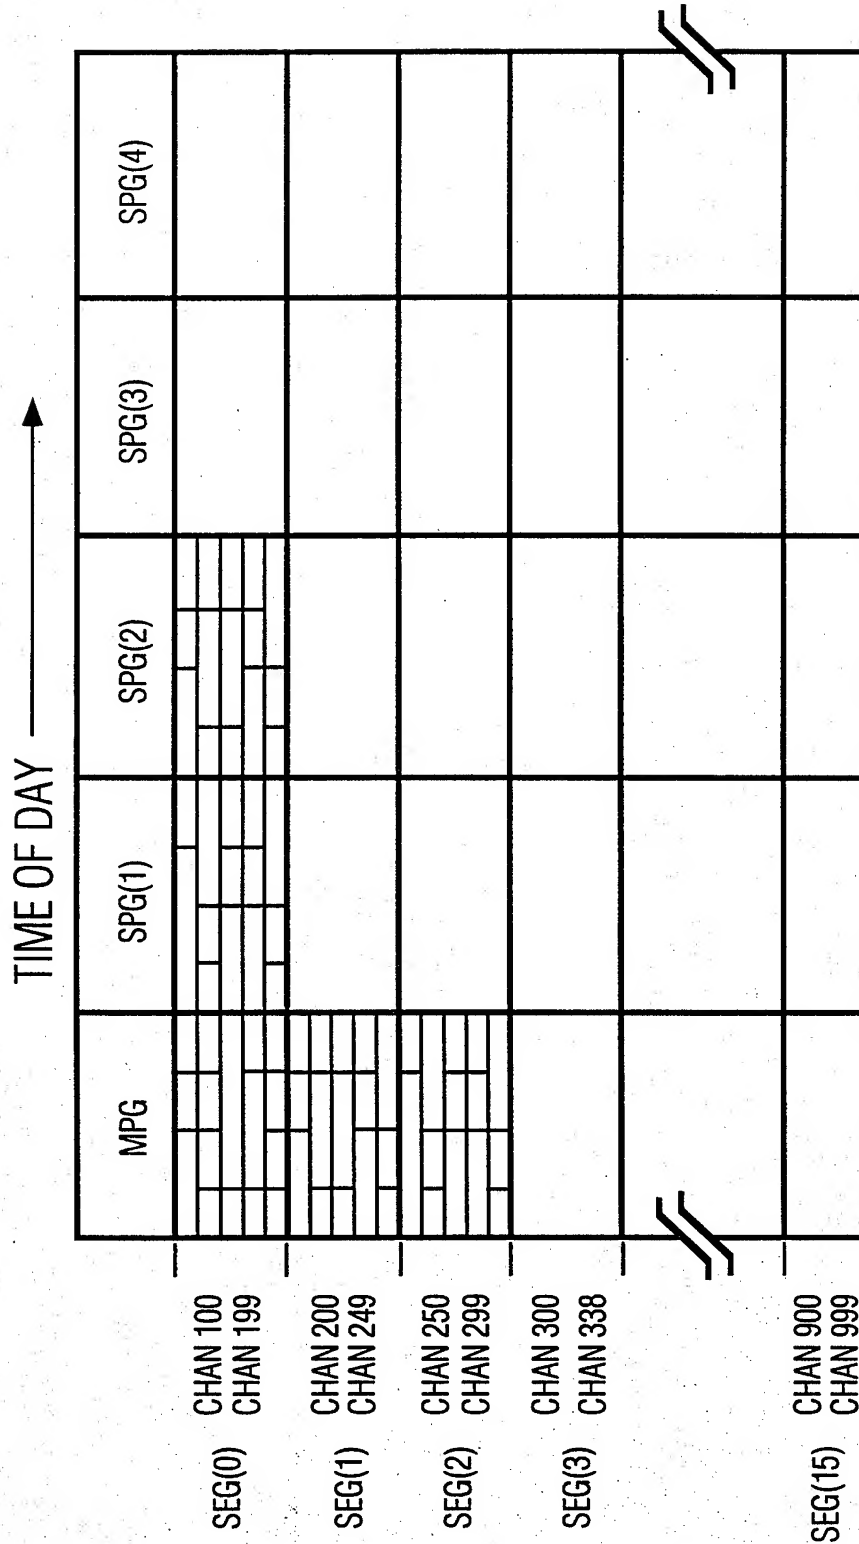

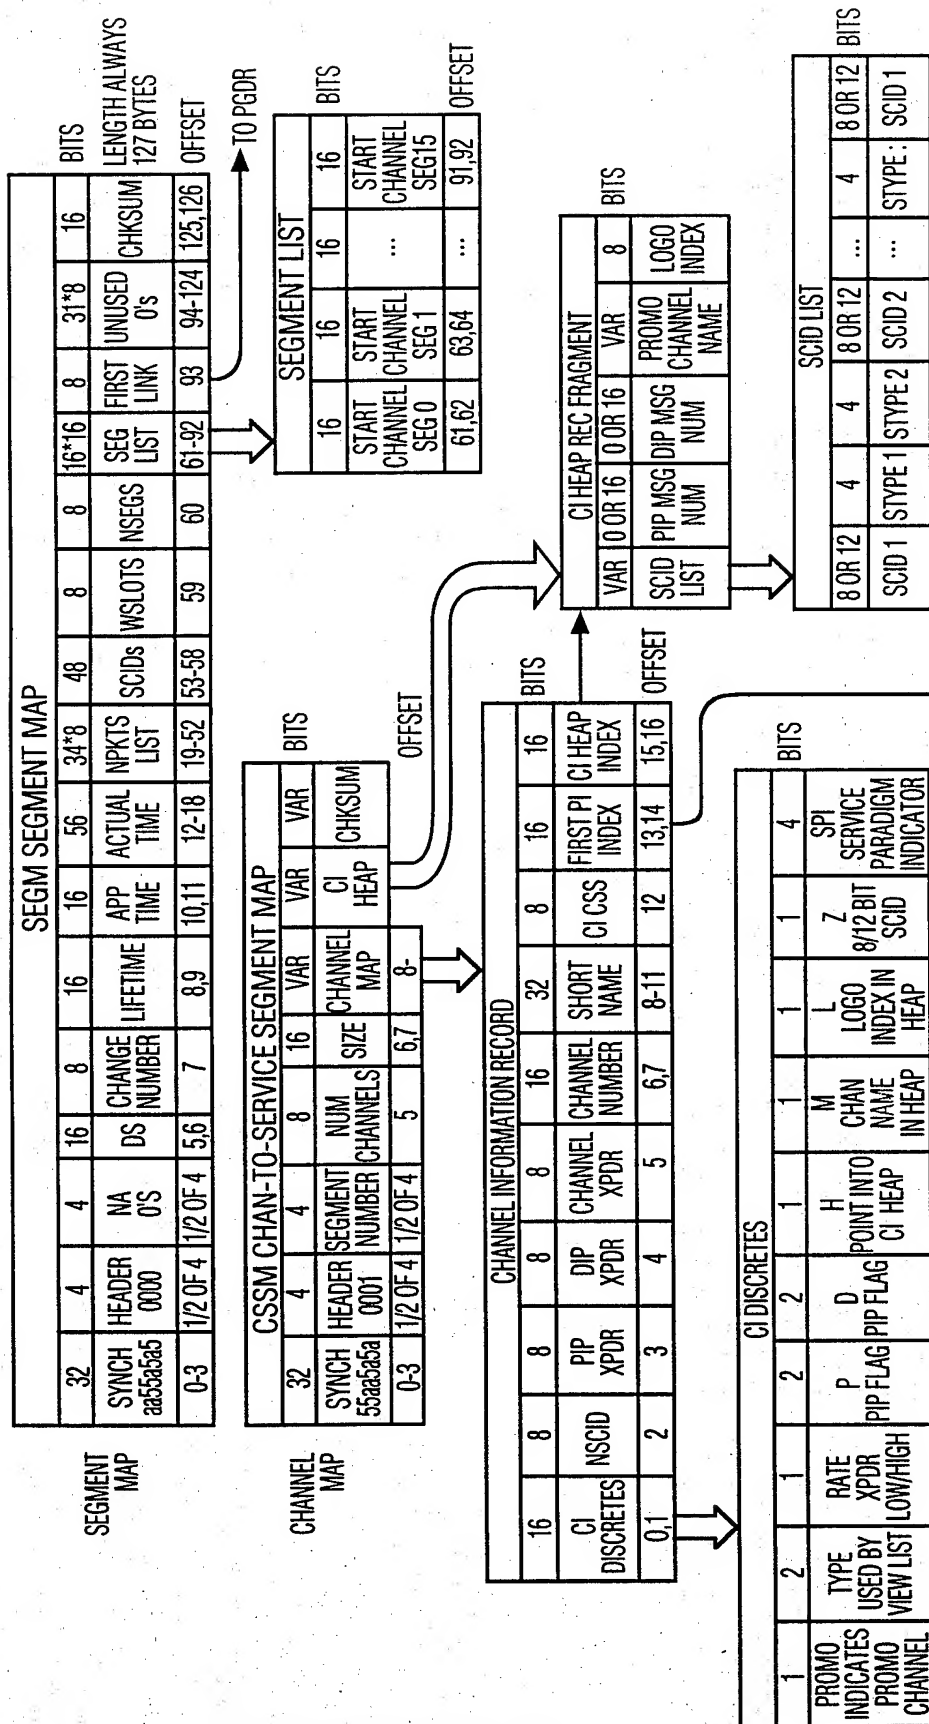


FIG. 5a



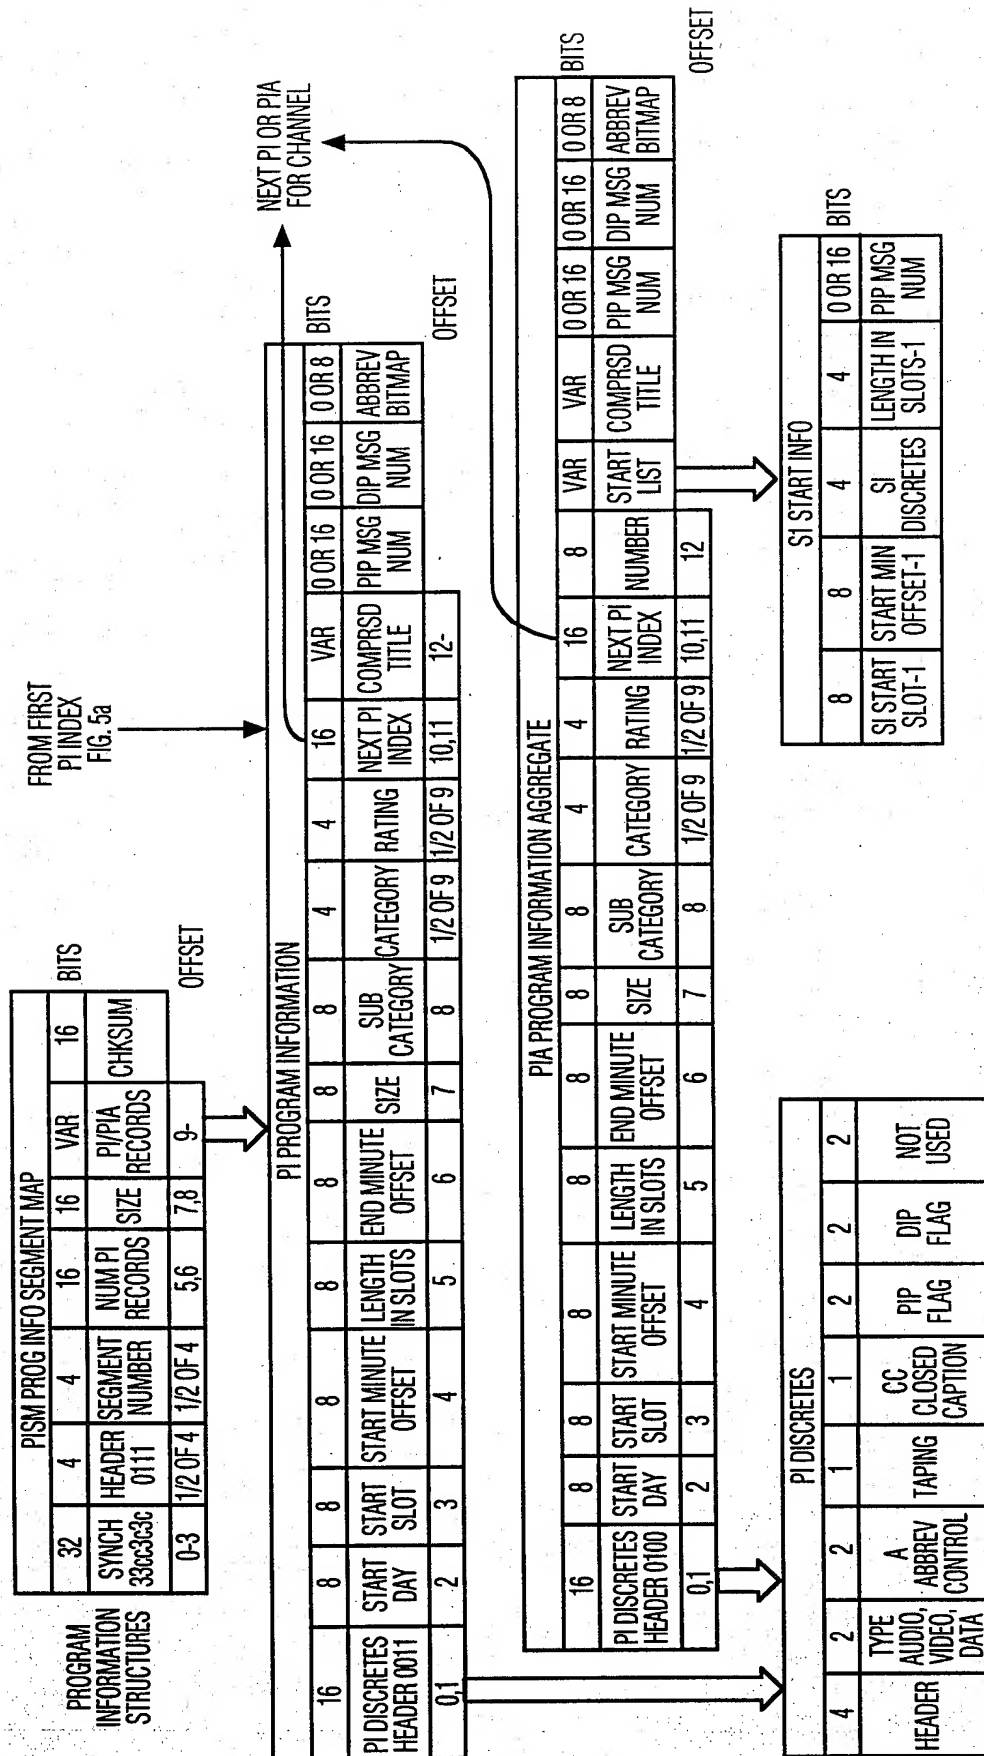


FIG. 5b

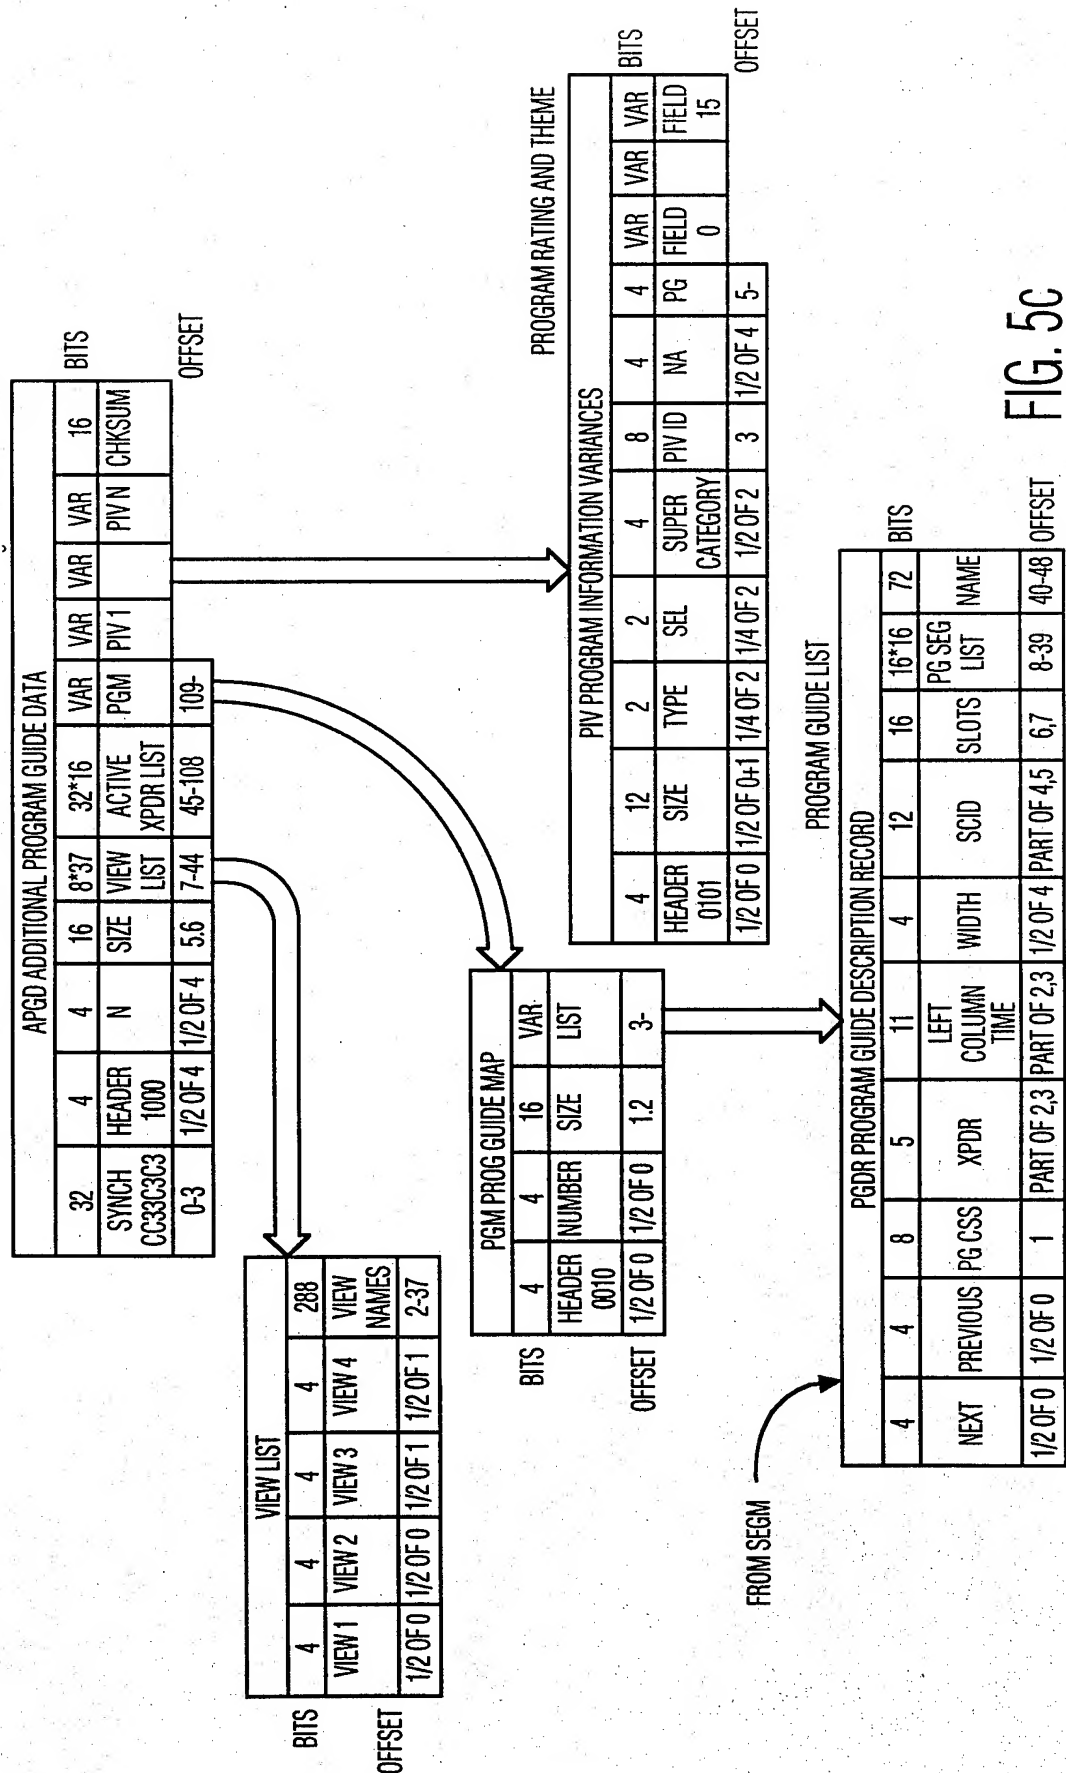


FIG. 5C

7/9

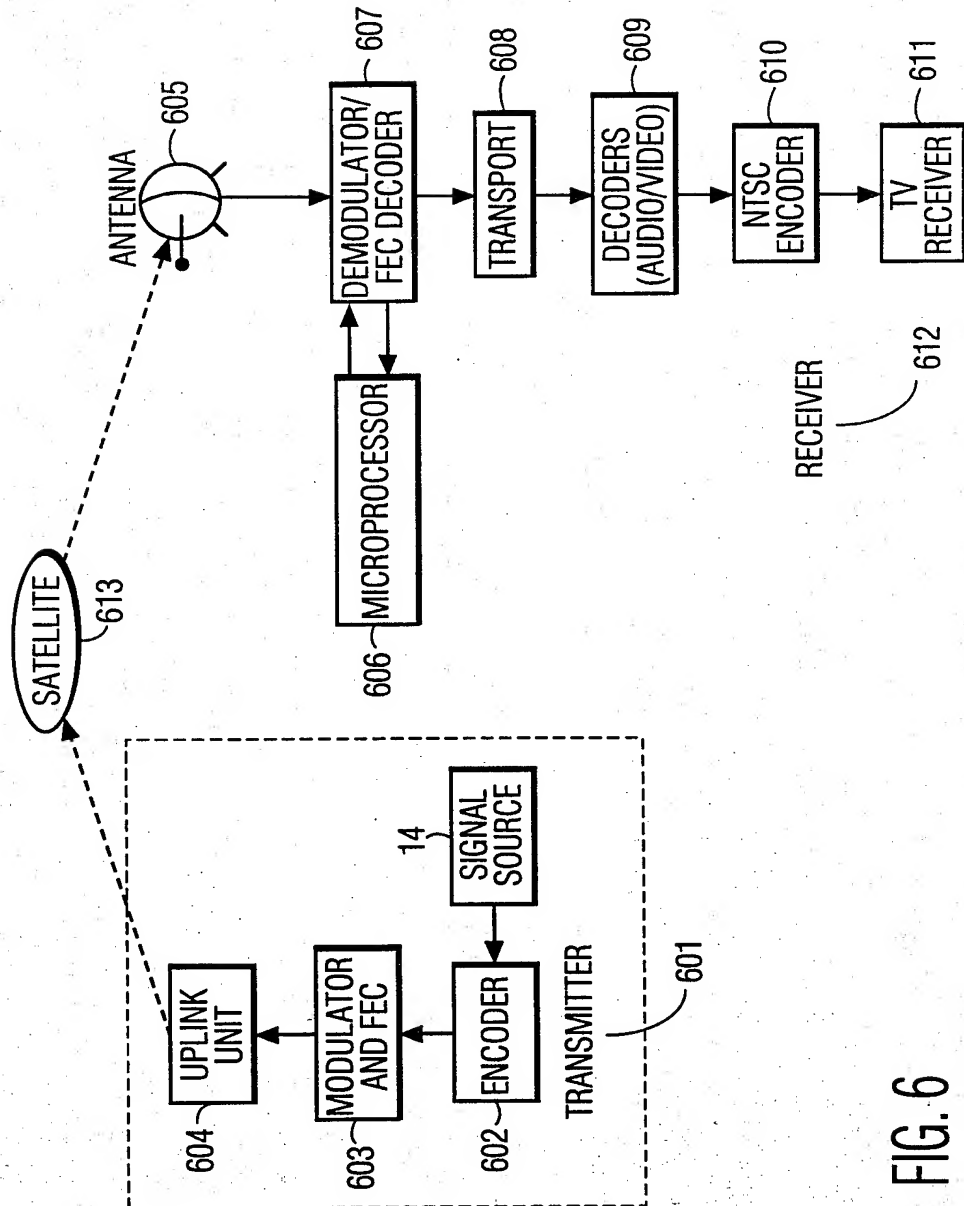


FIG. 6

8/9

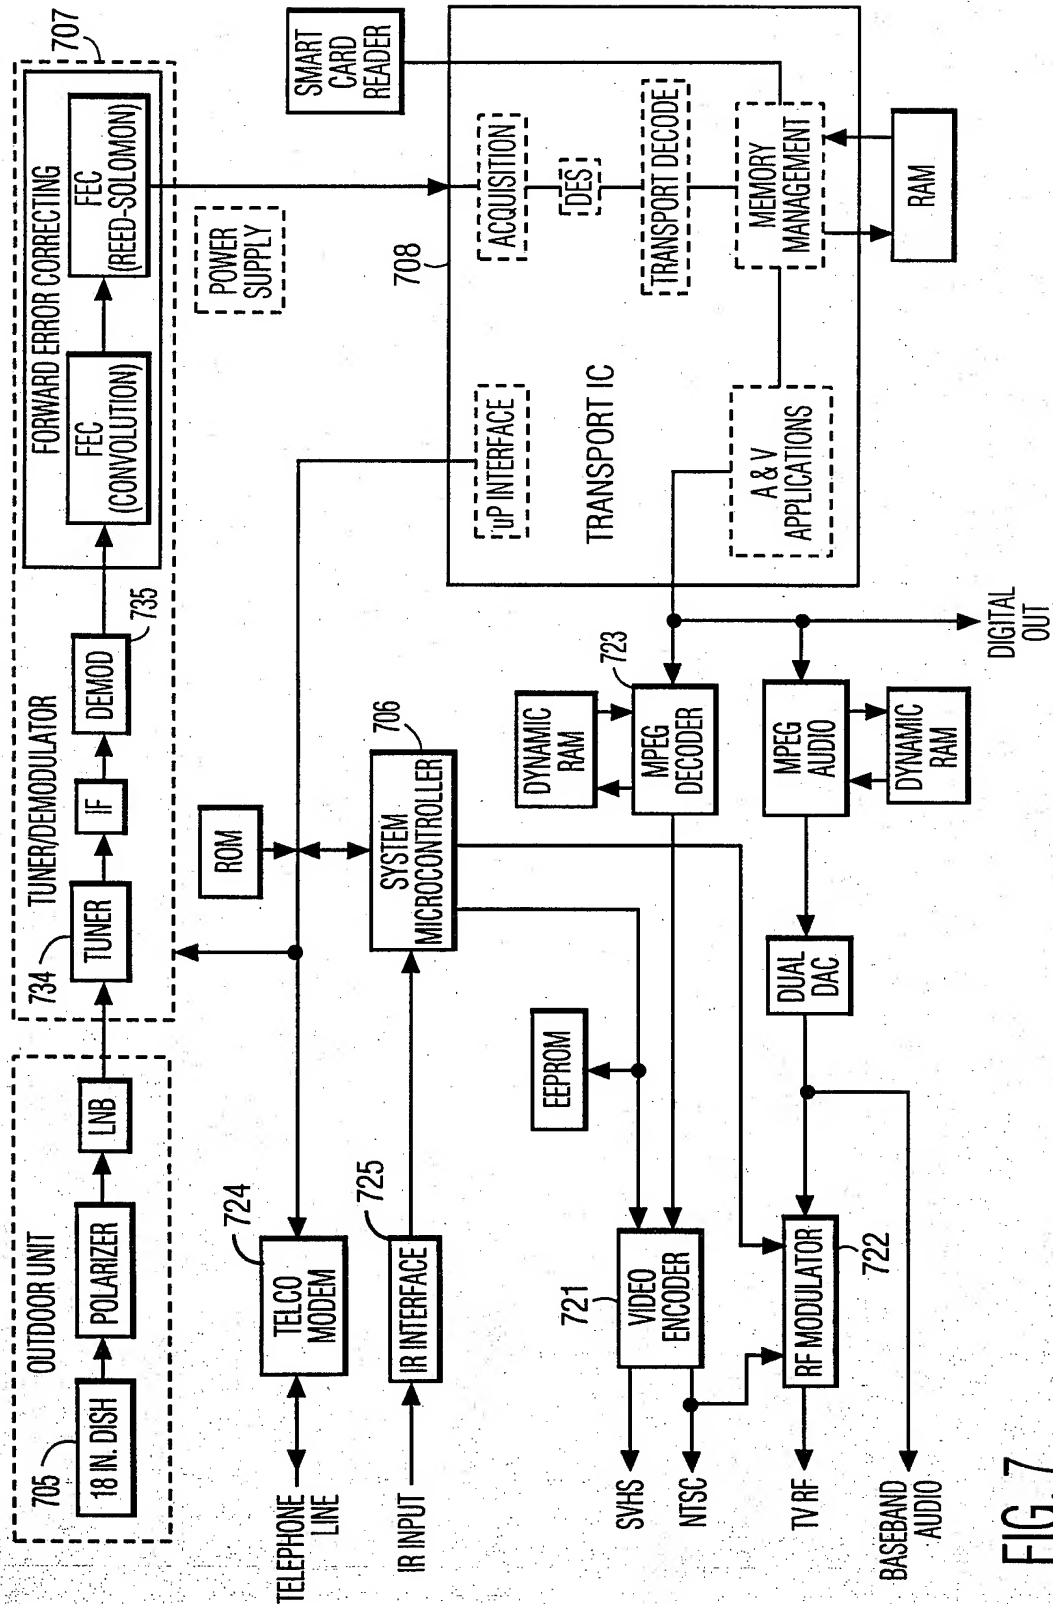


FIG. 7

9/9

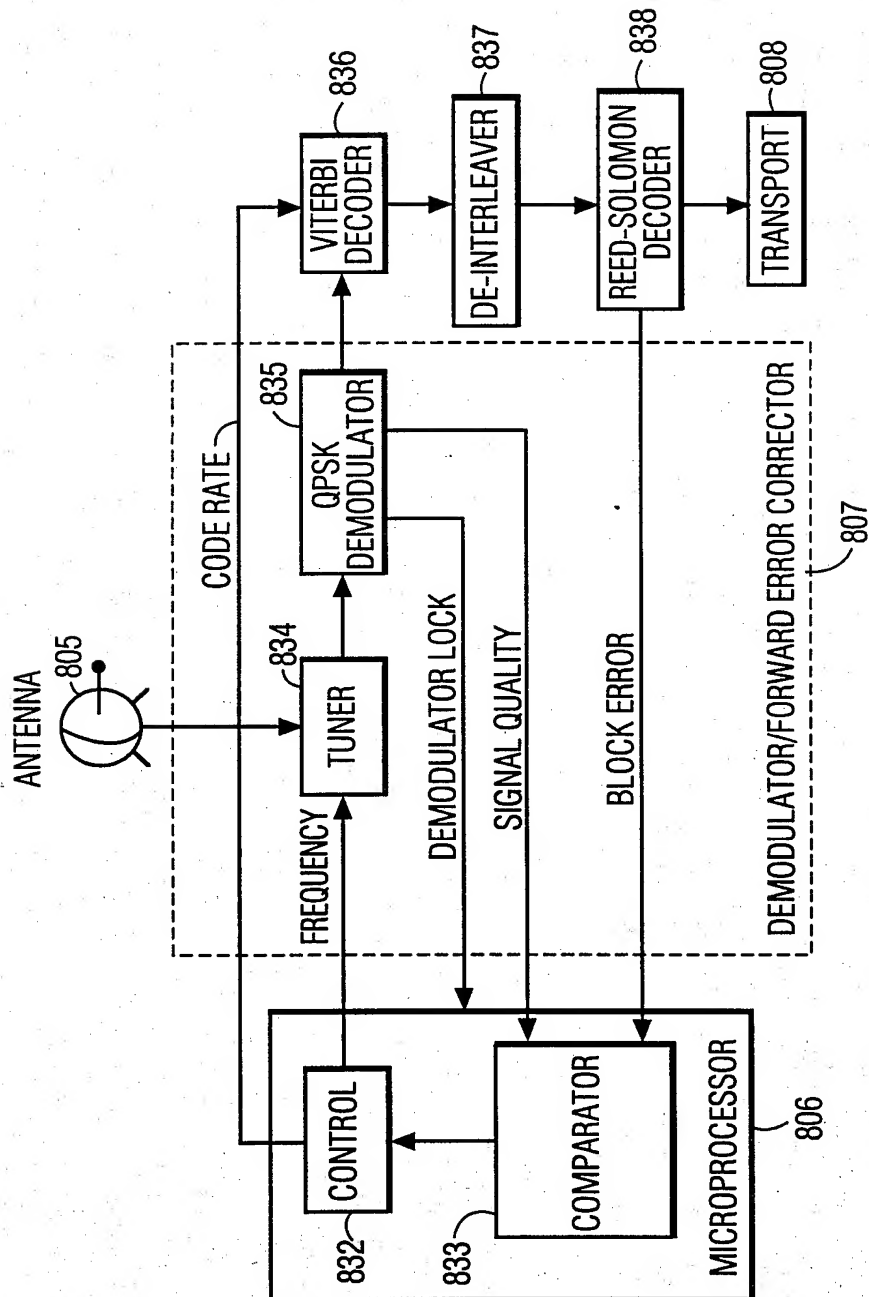


FIG. 8

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 95/00109

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H04N7/16 H04N7/58

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	18TH INTERNATIONAL TELEVISION SYMPOSIUM AND TECHNICAL EXHIBITION, MONTREUX, SWITZERLAND, page 458 BOYER 'DIGITAL BROADCAST SATELLITE SYSTEM' see the whole document ---	1-11
A	42ND ANNUAL CONVENTION AND EXPOSITION OF THE NATIONAL CABLE TELEVISION ASSOCIATION, SAN FRANCISCO, CALIFORNIA, page 185 COX ET AL. 'EXTENDED SERVICES IN A DIGITAL COMPRESSED SYSTEM' see the whole document --- -/--	1-11

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier document but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.  
"&" document member of the same patent family

Date of the actual completion of the international search

25 April 1995

Date of mailing of the international search report

18. 05. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Greve, M

## INTERNATIONAL SEARCH REPORT

Int. onal Application No

PCT/US 95/00109

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	42ND ANNUAL CONVENTION AND EXPOSITION OF THE NATIONAL CABLE TELEVISION ASSOCIATION, SAN FRANCISCO, CALIFORNIA, page 82 DAILY 'ADDRESSABLE DECODER WITH DOWNLOADABLE OPERATION' see the whole document ----	1-11
A	EP,A,0 479 432 (AMERICAN TELEPHONE & TELEGRAPH) 8 April 1992 see abstract ----	1-3
A	42ND ANNUAL CONVENTION AND EXPOSITION OF THE NATIONAL CABLE TELEVISION ASSOCIATION, SAN FRANCISCO, CALIFORNIA, page 223 BESTLER 'FLEXIBLE DATA STRUCTURES AND INTERFACE RITUALS FOR RAPID DEVELOPMENT OF OSD APPLICATIONS' see the whole document ----	1-6
A	US,A,4 264 925 (FREEMAN MICHAEL J ET AL) 28 April 1981 see abstract -----	8-11

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 95/00109

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0479432	08-04-92	US-A- 5115309 CA-A- 2049692 JP-A- 7023347	19-05-92 10-03-92 24-01-95
US-A-4264925	28-04-81	NONE	